




DIESEL

HVO

2 YEAR WARRANTY



- Back lit LCD display with an electronic meter calibration facility via the display
- OPTION: Dual/second sided display
- OPTION: Front nozzle holster
- OPTION: Automatic nozzle
- Stainless steel cabinet
- Steel braided hose 3.66m
- Removable side panel
- External base mounting holes

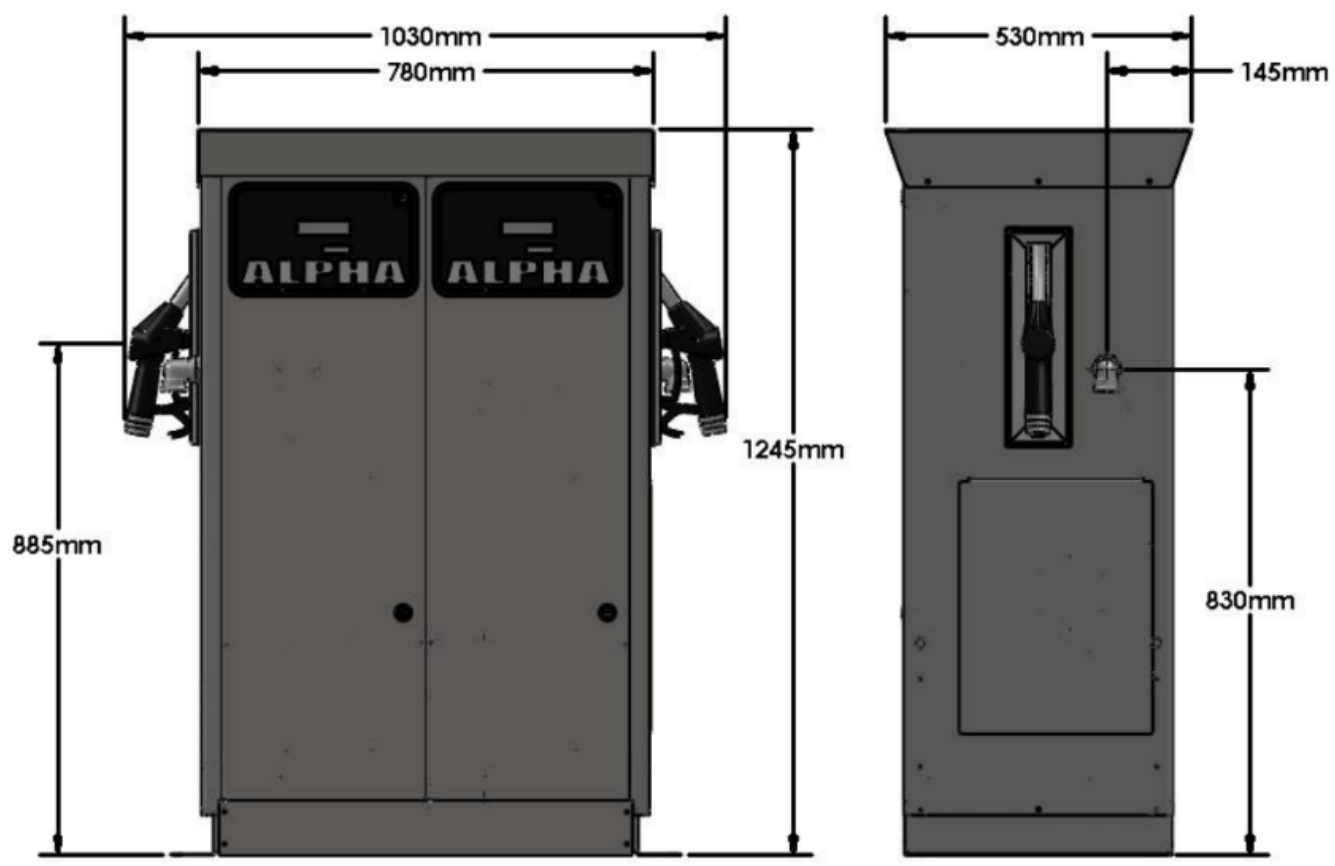

# Alpha Heavy Duty Commercial Fuel Pump

**HYTEK**  
Fuel Transfer Solutions

The Pumptonics ALPHA pump range is now ATEX approved for pumping diesel.

The ALPHA twin is ideal when you require either two different speeds &/or when gasoil/diesel is to be dispensed at the same time as each side has its own pump unit, meter, display & outlet/delivery hose. Choose: 50/50, 50/70, 50/90, 70/70, 70/90, 90/90 pumping speeds (litres per minute). Standard set up lower speed outlet on the left, high speed outlet on the right.

- Pumping Speed:** Choose 50L/min version for filling cars & vans, 70L/min for filling trucks & 90L/min for filling vehicles with larger fuel tanks, coaches, buses & articulated trucks.
- Accuracy:** Diesel versions are accurate to +/- 0.25%.
- Display:** Single sided electronic display shows up to 99,999.9 litres, the electronic totaliser keeps an ongoing total of fuel used up to 99,999,999 litres. Dual sided display optional.
- Nozzle Operated:** No switches, levers or handles to operate or break. Simply remove the nozzle & the pump starts, replace & the pump stops. Next time you remove the nozzle the display resets. (Nozzles not included, choose the make you prefer).
- Fuel Management System Interface:** All versions can easily be interfaced with most existing or new key/card fuel management systems as a 10:1/100:1 pulse transmitter is fitted as standard.
- Cabinet:** Modern robust cabinet, completely stainless steel to prevent corrosion. Individual parts can be replaced in the unfortunate event of accident damage.
- Easy to Maintain:** Good access for service engineers allows for easy & quick maintenance. (Speak to your distributor for maintenance schedule/contract)
- Supplied With:** Outlet hose & suction inlet flexible connector.
- Compatibility:** Use to dispense diesel.
- Options:** Automatic shut off nozzles, breakaway couplings & hose retractors. Ask for full list.

**FOR USE ON BELOW OR ABOVE GROUND STORAGE TANKS. NOT CURRENTLY SUITABLE FOR RESALE OR FOR USE WITH PETROL.**

Supplied by

**Pumptronics**